

Unear V5000X UHD Conference Camera

V5000X




Key Features

- The strongest zoom lens, close-up high-definition rendering in the distance
- 350° omnidirectional PTZ rotation, panoramic view of the venue
- Diversified installation methods, simple and flexible choice
- 4K image quality, ultra clear details

Specifications

Camera Specs	
Aperture	F 1.8~2.8
Sensor	1/2.8 in, CMOS, the maximum pixel is 8MP
Focusing mode	5x optical zoom + 3x digital zoom
FOV(V)	Wide 53° tele12.8°
FOV(H)	Wide 85°tele22°
FOV(D)	Wide 95°tele27.4°
Non-Distortion Lens	Supported
Video Specs	
Anti-flickering	Supported
Auto exposure	Supported
Auto White balance	Supported
HDR	Supported
3D noise-suppression	Supported
Max. resolution	UHD[4K]
Aspect ratio	16:09
Coded format	YUV: max to 480P@30fps MJPEG: max to1080P@30fps H264: max to2160P@30fps
PTZ Specs	
Horizontal rotation range	±175°
Vertical rotation range	±30°
Horizontal rotation speed range	1.7° ~ 100°/s
Vertical rotation speed range	0.7° ~ 28°/s
Flip horizontally and vertically	Supported
Preset Function	4 presets
Preset position accuracy	0.5°
Interface	
POWER	DC round mouth 5.5/2.1mm
USB	USB2.0 Type-C
HDMI	HDMI
Network port	RJ45(pay for NDIprotocol)
Configuration Requirements	
PC Windows or Linux, Mac OS	Supported
Input / Output	
Power supply	DC 12V/1.5A
Data Transmission over USB Type-C	Supported
USB 2.0	Supported
Installation Method	
TV stand (optional) / wall mount (optional)/tripod(optional)	Supported

Dimensions

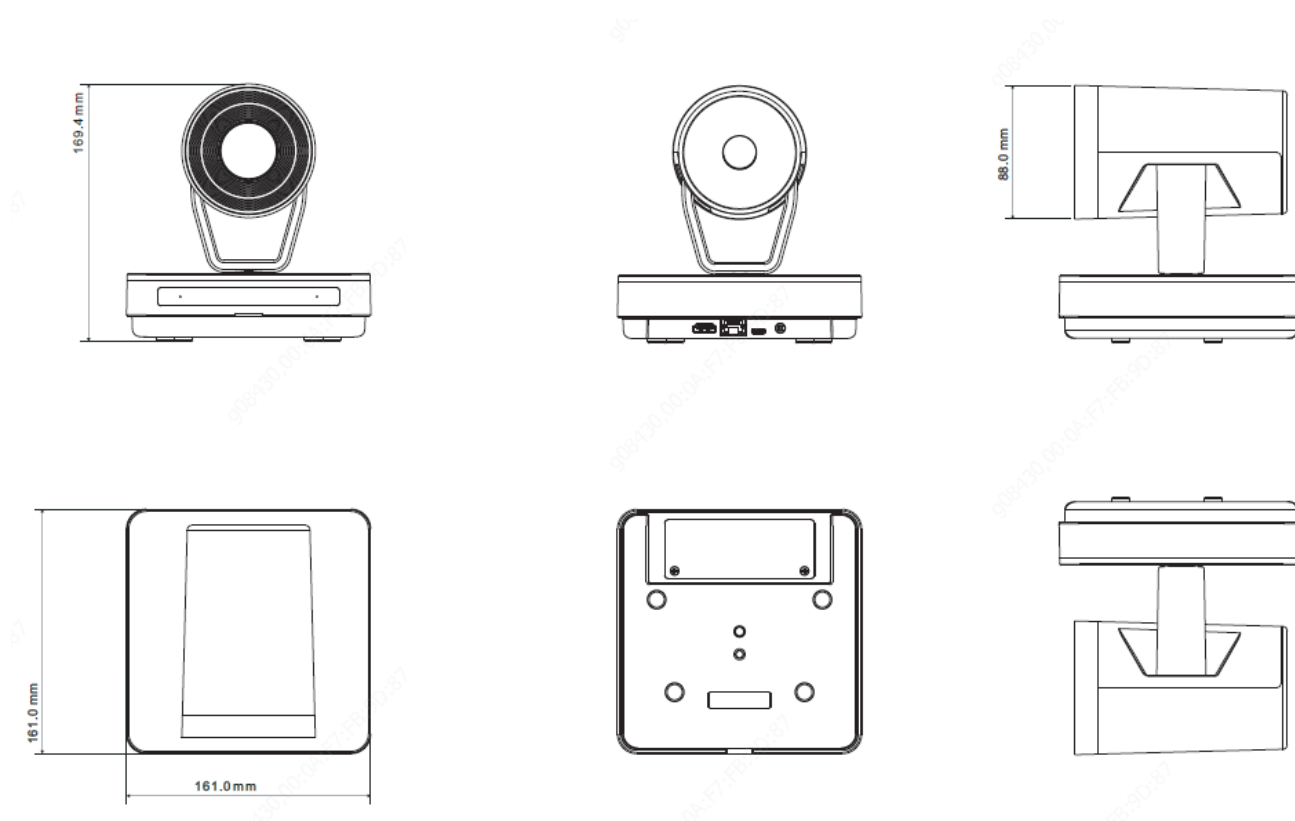

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.