A decorative graphic on the left side of the page. It features a grey circle on a thin grey line that curves downwards from the top left towards the bottom right. Below this line are two overlapping curved shapes: a light grey one on top and a darker grey one on the bottom, both curving from the left edge towards the right.

Smart Interactive Display (Wireless Module) Quick Guide

1 Safety Warnings

The device must be installed, serviced and maintained by a trained professional with necessary safety knowledge and skills. Before installation, be sure to carefully read and implement the safety instructions specified in this manual.

- Make sure the power supply meets the requirements indicated on the device, and the supply voltage is stable. Non-compliant power supplies may cause device failure.
- The operating temperature for the device is 0°C to 50°C. Operation out of this range may cause device failure. The operating humidity is 10%RH to 90%RH (noncondensing). Use a dehumidifier if necessary.
- Take effective measures to protect the power cord from being tramped or pressed.
- Keep the device away from fire and water.
- Do not open the cabinet as there are high voltage components inside.
- Handle with care during transportation and installation. Do not knock, squeeze or carve the screen with hard objects. User shall assume total responsibility for damages caused by improper user operations.
- Use the device in a clean environment.
- Installing or moving the device shall be done by more than two people. Avoid placing the device on uneven surfaces to prevent personal injury and device damage from tip-over.
- Unplug the power cord before leaving this device unused for long periods. Do not turn on and off frequently. Wait at least 3 minutes before turning on/off again.
- Do not insert objects of any kind into the device via the vent or input/output ports. It may cause short circuit, device failure, or electric shock. Be especially careful when children are present.
- When the device is moved from a cold environment to a warm environment, condensation may occur inside the device. Please wait for a while for the condensation to fully dissipate before powering on the device.

2 Packing List

Contact your local dealer if the package is damaged or incomplete. The package contents may vary with device model.


No.	Name	Qty	Unit
1	Smart interactive display	1	PCS
2	Wireless module	1	PCS
3	Power cable	1	PCS
4	Touch pen	2	PCS
5	Wall mount bracket	1	Set
6	Remote control	1	PCS
7	Product documents	1	Set

3 Product Overview

The appearance and interfaces may vary with device model.


3.1 Appearance

Figure 3-1 Front View

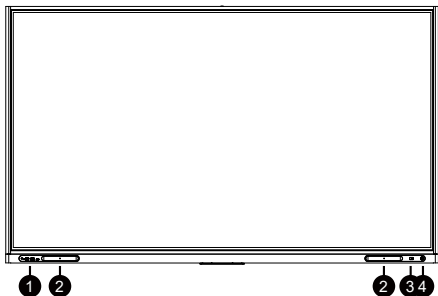

1. Front interfaces	2. Touch pen slot
3. NFC detection area	4. Power button

Figure 3-2 Rear View

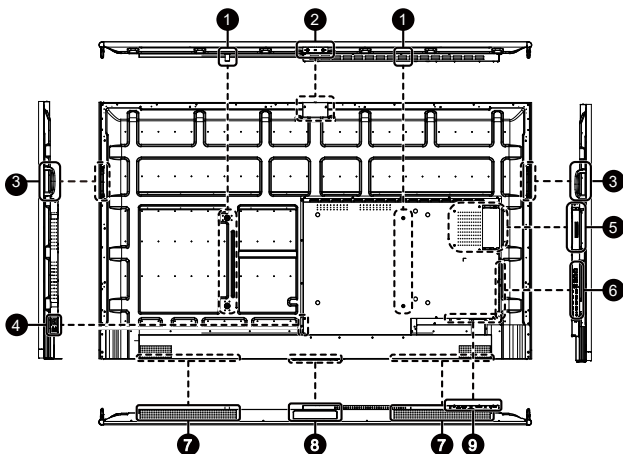

1. Bracket mounting hole	2. Module connector	3. Handle
4. Power interface, power switch	5. OPS computer slot	6. Side interfaces
7. Speaker	8. Wireless module slot	9. Bottom interfaces

3.2 Interfaces/Buttons


Figure 3-3 Front Interfaces (Left Panel)



Name	Description
IR IN	Infrared receiver, receives infrared signals from the infrared remote control to control the display.

Name	Description
Photosensitive sensor	Adjust the screen brightness automatically based on the ambient light intensity.
USB	USB 3.0 interface (supports both Android and Windows), connects to a USB device such as USB flash drive (used for storage expansion), keyboard and mouse (used to control this device), and camera (used for snapshot and recording).
TYPE-C	<p>Type-C interface</p> <ul style="list-style-type: none"> Video input/touch output interface: Connects to a video source device such as PC via the DP converter for video input. <p>If the video source device is controllable, it supports touch control on this display; it can use USB devices connected to this display, such as USB flash drives, keyboards and mice, cameras, etc.</p> <ul style="list-style-type: none"> USB 3.0 input interface: See the USB description in Front Interfaces (Left Panel) for details.
Touch pen detection hole	Pick up the touch pen from the pen slot, the pop-up windows appear, and then you can one-tap to open Annotation and Whiteboard.


Figure 3-4 Front Interfaces (Right Panel)



Name	Description
Touch pen detection hole	See the touch pen detection hole description in Left Front Interfaces (Left Panel) for details.
NFC detection area	After enabling the hotspot on this device, download the screen sharing software on your Android phone and enable the wireless network and NFC function, place the back of the phone

Name	Description
	close to the NFC detection area, and the phone will automatically open the screen sharing software and connect to the hotspot. Then, you can follow the prompts on your phone to start screen sharing.
Power button	<p>When the device is powered on but not started, press the button to start the device; when the device is operating, press the button to select the power status.</p> <ul style="list-style-type: none"> ● Red: The device is in standby state. ● White: The device is starting/running normally. ● Off: The device is powered off.

Figure 3-5 Side Interfaces



Name	Description
LINE OUT	Audio output interface, connects to an audio playback device such as speaker for audio output.
LINE IN	Audio input interface, connects to an audio source device such as player for audio input.
HDMI IN	HDMI video input interface, connects to a video source device such as PC for video input.
HDMI OUT	HDMI video output interface, connects to a display device such as display screen for video output.
DP OUT	DP video output interface, connects to a display device such as display screen for video output.
USB	USB 3.0 interface, supports both Android and Windows. See the USB 3.0 description in Front Interfaces (Left Panel) for details.
TOUCH OUT	Touch output interface, connects to the same video source device with HDMI video input interface, such as PC, for touch control to the video source device, and the video source device can use USB devices connected to this display, such as USB flash drives, keyboards and mouses, cameras, etc.

Name	Description
LAN IN	Network input interface (supports both Android and Windows), connects to a network device such as switch for network access.
LAN OUT	<p>Network output interface, connects to other devices such as PC and display so that other devices can access the network and be on the same network as this device.</p> <p>Note:</p> <p>This interface is available only when the LAN IN interface is connected to Ethernet.</p>


Figure 3-6 Bottom Interfaces



Name	Description
SPDIF	Audio output interface, connects to an audio playback device such as speaker for audio output.
TYPE-C	Type-C interface, connects to a USB device such as USB flash drive (used for storage expansion), keyboard and mouse (used to control this device), and camera (used for snapshot and recording).
RS232	RS232 interface, connects to other devices such as PC for control signal input via the serial port tool.
USB ANDROID	USB 3.0 interface, supports Android only. See the USB 3.0 description in Front Interfaces (Left Panel) for details.
VGA IN	VGA video input interface, connects to a video source device such as PC for video input.
PC AUDIO	Audio input interface, connects to the same video source device such as PC with VGA input and YPBRP input interfaces for video and audio input.
YPBRP IN	YPBRP video input interface, connects to a video source device such as PC for video input.

Name	Description
DP IN	DP video input interface, connects to a video source device such as PC for video input.
TF CARD	TF card slot, used to install a TF card for storage expansion.
EARPHONE	Audio interface, connects to an audio source/playback device such as player, speaker, and headphone for audio input/output.

Figure 3-7 Power Interface




Name	Description
Power interface	Connect the device to power via the power cable that meets the marked power requirements.
Power switch	Power on/off the device.

3.3 Wireless Module

The wireless module is divided into two parts: Wi-Fi module and Bluetooth module. If you need to connect to wireless networks or Bluetooth devices, please install a wireless module first.

- Wi-Fi module: Wi-Fi 6 + Wi-Fi 5, Wi-Fi 6 for uplink routing, supports 2.4/5GHz.
- Bluetooth module: Integrated with Wi-Fi 6 module, built-in antenna, supports Bluetooth 5.2 protocol.

Figure 3-8 Wireless Module

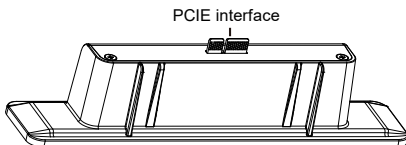


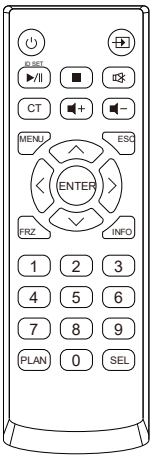







Insert the wireless module into the wireless module slot at the bottom of the device.
The wireless module is hot-pluggable.

3.4 Remote Control



NOTE!

The buttons not shown in the table below are reserved functions and are currently unavailable.

Button	Description	Diagram
	Turn on/off the device. CAUTION! After you turn off the device using the remote control, the device remains powered on. Please be aware of fire and electric hazards.	
	Switch the signal source and display the corresponding image.	
	Play/pause video.	
	Stop video and exit the playback screen.	
	Turn off/on sound.	
	Turn up the volume.	
	Turn down the volume.	
	<ul style="list-style-type: none">Choose up/down/left/right.Change values.	
ENTER	Confirm the selection.	
MENU	Open the setting screen.	
ESC	Return to the previous screen.	
0~9	Select the number.	

4 Installation

4.1 Bracket Installation

The device supports wall installation and floor installation. You can use the supplied wall mount bracket to fix the device to the wall, or purchase our mobile stands. See the corresponding documents for details.

4.2 Cable Connection

Connect cables and other devices as needed. See [Interfaces/Buttons](#) for details.

5 Startup

For first use, connect the device to power and turn the power switch on to start up it. After startup, complete the initial configuration of the device according to the startup wizard.






NOTE!

- You can set the boot mode under **Settings > System > Power > Boot Mode**.
- Standby power consumption $\leq 0.5W$.

6 GUI Introduction

6.1 Icons

Icon	Description
	Hide the navigation bar.
	View tutorial videos, operation guides, and FAQs.
	Return to the previous screen.
	Return to the home screen.
	Process management. View all the running apps.
	Switch the signal source and display the corresponding image.

Icon	Description
	Set network, display, sound, etc.
	Select the power status, including sleep, restart, and shutdown.
	Various small tools, such as annotation and volume adjustment.

6.2 Features



High-precision touch, smooth writing



Wireless screen mirroring, easy sharing



Minimalist interaction design, easy to use



4K ultra-wide angle camera, wide field of view



Professional acoustic design, immersive listening experience



High-performance Android, smooth to use

More exciting features for you to explore...

7 FAQ

If	Then
The power indicator lights in red and cannot change to white.	<ul style="list-style-type: none"> Check if the voltage and grounding of the power cable plug are normal. Press the power button on the display/remote control to turn on the display.

If	Then
The display cannot be turned on; there is no image and sound; the power indicator is not lit.	<ul style="list-style-type: none"> ● Check if the voltage and grounding of the power cable plug are normal. ● Check if the rocker switch is switched to position “1”. ● Check if the power button on the display/remote control is normal.
Some buttons do not work.	<ul style="list-style-type: none"> ● Check if the buttons cannot pop up due to excessive force. ● Check if there is dust accumulated in the gap of the buttons.
The display cannot recognize the connected PC.	<ul style="list-style-type: none"> ● Try another TOUCH interface. ● Replace the touch cable. ● Reinstall the system.
There is no sound coming from the display.	<p>Turn up the sound volume. If there is still no sound, please operate as follows:</p> <ul style="list-style-type: none"> ● Check if the speaker is normal. Plug the storage device with audio into the USB interface, and play audio to test if there is sound output. If there is sound, the speaker is normal, if there is no sound, the speaker or the board may have problems. ● If the speaker is normal, it is usually a system problem, please reinstall the system.
There is noise coming from the external speaker.	<ul style="list-style-type: none"> ● Check if there is electromagnetic interference. ● Plug in headphones and listen if there is noise. If there is no noise, you need to replace a speaker.
The Wi-Fi signal is weak.	<ul style="list-style-type: none"> ● Check if the wireless router works properly. ● Make sure there is no obstacle around the Wi-Fi antenna.

If	Then
The device cannot connect to a Wi-Fi.	<ul style="list-style-type: none"> ● Check if the wireless router works properly. ● Check if it is necessary to obtain an IP address automatically.
The display cannot connect to a wired network.	<p>Check if the wired network and the network cable is normal.</p> <ul style="list-style-type: none"> ● For Win7, go to Control Panel > Network and Internet > Network and Sharing Center > Change adapter settings, right-click a local area connection, click Properties, select Internet Protocol Version 4 (TCP/IPv4), double-click the protocol, enable Obtain an IP address automatically and Obtain DNS server address automatically. ● For Win10, go to Settings > Network & Internet > Network and Sharing Center > Change adapter settings, right-click a local area connection, click Properties, select Internet Protocol Version 4 (TCP/IPv4), double-click the protocol, enable Obtain an IP address automatically and Obtain DNS server address automatically.
There is water mist between the display screen and top glass.	<p>This problem is caused by the temperature difference between the inside and outside of the glass. The water mist generally disappears after the display is powered on and does not affect the normal operation of the device.</p>
There are lines or ripples in images.	<ul style="list-style-type: none"> ● Check if there is interference near the device. Keep the device away from interference or insert the power plug into another socket. ● Check if the video cables are of high quality.

If	Then
The device has no response and can not be operated.	Disconnect the power supply, wait one minute, and then restart the device.
The display shows delayed or no touch response.	Check if too many programs are running. Stop the programs that cause high memory usage or restart the device.
The OPS computer cannot be turned on normally; there is no image on the screen and no touch reponse.	Unplug the OPS computer and plug in again.

Disclaimer and Safety Warnings

Copyright Statement

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

No part of this manual may be copied, reproduced, translated or distributed in any form or by any means without prior consent in writing from Zhejiang Uniview Technologies Co., Ltd (referred to as Uniview or us hereafter).

The product described in this manual may contain proprietary software owned by Uniview and its possible licensors. Unless permitted by Uniview and its licensors, no one is allowed to copy, distribute, modify, abstract, decompile, disassemble, decrypt, reverse engineer, rent, transfer, or sublicense the software in any form by any means.

Trademark Acknowledgements



are trademarks or registered trademarks of Uniview.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

All other trademarks, products, services and companies in this manual or the product described in this manual are the property of their respective owners.

Export Compliance Statement

Uniview complies with applicable export control laws and regulations worldwide, including that of the People's Republic of China and the United States, and abides by relevant regulations relating to the export, re-export and transfer of hardware, software and technology. Regarding the product described in this manual, Uniview asks you to fully understand and strictly abide by the applicable export laws and regulations worldwide.

EU Authorised Representative

UNV Technology EUROPE B.V. Room 2945, 3rd Floor, Randstad 21-05 G, 1314 BD, Almere, Netherlands.

Privacy Protection Reminder

Uniview complies with appropriate privacy protection laws and is committed to protecting user privacy. You may want to read our full privacy policy at our website and get to know the ways we process your personal information. Please be aware, using the product described in this manual may involve the collection of personal information such as face, fingerprint, license plate number, email, phone number, GPS. Please abide by your local laws and regulations while using the product.

About This Manual

- This manual is intended for multiple product models, and the photos, illustrations, descriptions, etc, in this manual may be different from the actual appearances, functions,

features, etc., of the product.

- This manual is intended for multiple software versions, and the illustrations and descriptions in this manual may be different from the actual GUI and functions of the software.
- Despite our best efforts, technical or typographical errors may exist in this manual. Uniview cannot be held responsible for any such errors and reserves the right to change the manual without prior notice.
- Users are fully responsible for the damages and losses that arise due to improper operation.
- Uniview reserves the right to change any information in this manual without any prior notice or indication. Due to such reasons as product version upgrade or regulatory requirement of relevant regions, this manual will be periodically updated.

Disclaimer of Liability

- To the extent allowed by applicable law, in no event will Uniview be liable for any special, incidental, indirect, consequential damages, nor for any loss of profits, data, and documents.
- The product described in this manual is provided on an "as is" basis. Unless required by applicable law, this manual is only for informational purpose, and all statements, information, and recommendations in this manual are presented without warranty of any kind, expressed or implied, including, but not limited to, merchantability, satisfaction with quality, fitness for a particular purpose, and noninfringement.
- Users must assume total responsibility and all risks for connecting the product to the Internet, including, but not limited to, network attack, hacking, and virus. Uniview strongly recommends that users take all necessary measures to enhance the protection of network, device, data and personal information. Uniview disclaims any liability related thereto but will readily provide necessary security related support.
- To the extent not prohibited by applicable law, in no event will Uniview and its employees, licensors, subsidiary, affiliates be liable for results arising out of using or inability to use the product or service, including, not limited to, loss of profits and any other commercial damages or losses, loss of data, procurement of substitute goods or services; property damage, personal injury, business interruption, loss of business information, or any special, direct, indirect, incidental, consequential, pecuniary, coverage, exemplary, subsidiary losses, however caused and on any theory of liability, whether in contract, strict liability or tort (including negligence or otherwise) in any way out of the use of the product, even if Uniview has been advised of the possibility of such damages (other than as may be required by applicable law in cases involving personal injury, incidental or subsidiary damage).
- To the extent allowed by applicable law, in no event shall Uniview's total liability to you for all damages for the product described in this manual (other than as may be required by applicable law in cases involving personal injury) exceed the amount of money that you have paid for the product.

Network Security

Please take all necessary measures to enhance network security for your device.

The following are necessary measures for the network security of your device:

- **Change default password and set strong password:** You are strongly recommended to change the default password after your first login and set a strong password of at least nine characters

including all three elements: digits, letters and special characters.

- **Keep firmware up to date:** It is recommended that your device is always upgraded to the latest version for the latest functions and better security. Visit Uniview's official website or contact your local dealer for the latest firmware.

The following are recommendations for enhancing network security of your device:

- **Change password regularly:** Change your device password on a regular basis and keep the password safe. Make sure only the authorized user can log in to the device.
- **Enable HTTPS/SSL:** Use SSL certificate to encrypt HTTP communications and ensure data security.
- **Enable IP address filtering:** Allow access only from the specified IP addresses.
- **Minimum port mapping:** Configure your router or firewall to open a minimum set of ports to the WAN and keep only the necessary port mappings. Never set the device as the DMZ host or configure a full cone NAT.
- **Disable the automatic login and save password features:** If multiple users have access to your computer, it is recommended that you disable these features to prevent unauthorized access.
- **Choose username and password discretely:** Avoid using the username and password of your social media, bank, email account, etc, as the username and password of your device, in case your social media, bank and email account information is leaked.
- **Restrict user permissions:** If more than one user needs access to your system, make sure each user is granted only the necessary permissions.
- **Disable UPnP:** When UPnP is enabled, the router will automatically map internal ports, and the system will automatically forward port data, which results in the risks of data leakage. Therefore, it is recommended to disable UPnP if HTTP and TCP port mapping have been enabled manually on your router.
- **SNMP:** Disable SNMP if you do not use it. If you do use it, then SNMPv3 is recommended.
- **Multicast:** Multicast is intended to transmit video to multiple devices. If you do not use this function, it is recommended you disable multicast on your network.
- **Check logs:** Check your device logs regularly to detect unauthorized access or abnormal operations.
- **Physical protection:** Keep the device in a locked room or cabinet to prevent unauthorized physical access.
- **Isolate video surveillance network:** Isolating your video surveillance network with other service networks helps prevent unauthorized access to devices in your security system from other service networks.

Learn More

You may also obtain security information under Security Response Center at Uniview's official website.

Safety Warnings

The device must be installed, serviced and maintained by a trained professional with necessary safety knowledge and skills. Before you start using the device, please read through this guide carefully and make sure all applicable requirements are met to avoid danger and loss of property.

Storage, Transportation, and Use

- Store or use the device in a proper environment that meets environmental requirements,

including and not limited to, temperature, humidity, dust, corrosive gases, electromagnetic radiation, etc.

- Make sure the device is securely installed or placed on a flat surface to prevent falling.
- Unless otherwise specified, do not stack devices.
- Ensure good ventilation in the operating environment. Do not cover the vents on the device. Allow adequate space for ventilation.
- Protect the device from liquid of any kind.
- Make sure the power supply provides a stable voltage that meets the power requirements of the device. Make sure the power supply's output power exceeds the total maximum power of all the connected devices.
- Verify that the device is properly installed before connecting it to power.
- Do not remove the seal from the device body without consulting Uniview first. Do not attempt to service the product yourself. Contact a trained professional for maintenance.
- Always disconnect the device from power before attempting to move the device.
- Take proper waterproof measures in accordance with requirements before using the device outdoors.

Power Requirements

- Install and use the device in strict accordance with your local electrical safety regulations.
- Use a UL certified power supply that meets LPS requirements if an adapter is used.
- Use the recommended cordset (power cord) in accordance with the specified ratings.
- Only use the power adapter supplied with your device.
- Use a mains socket outlet with a protective earthing (grounding) connection.
- Ground your device properly if the device is intended to be grounded.

Battery Use Caution

- When battery is used, avoid:
 - Extremely high or low temperature and air pressure during use, storage and transportation.
 - Battery replacement.
- Use the battery properly. Improper use of the battery such as the following may cause risks of fire, explosion or leakage of flammable liquid or gas.
 - Replace battery with an incorrect type.
 - Dispose of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery.
- Dispose of the used battery according to your local regulations or the battery manufacturer's instructions.

Avvertimento de l'utilisation de la batterie

- Lorsque utiliser la batterie, évitez:
 - Température et pression d'air extrêmement élevées ou basses pendant l'utilisation, le stockage et le transport.
 - Remplacement de la batterie.
- Utilisez la batterie correctement. Mauvaise utilisation de la batterie comme celles mentionnées ici, peut entraîner des risques d'incendie, d'explosion ou de fuite liquide de gaz inflammables.
 - Remplacer la batterie par un type incorrect.
 - Disposer d'une batterie dans le feu ou un four chaud, écraser mécaniquement ou couper la batterie.

- Disposer la batterie utilisée conformément à vos règlements locaux ou aux instructions du fabricant de la batterie.

Regulatory Compliance

FCC Statements

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Visit http://en.uniview.com/Support/Download_Center/Product_Installation/Declaration/ for SDoC.

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

LVD/EMC Directive



This product complies with the European Low Voltage Directive 2014/35/EU and EMC Directive 2014/30/EU.

WEEE Directive–2012/19/EU



The product this manual refers to is covered by the Waste Electrical & Electronic Equipment (WEEE) Directive and must be disposed of in a responsible manner.

Battery Regulation- (EU) 2023/1542



Battery in the product complies with the European Battery Regulation (EU) 2023/1542. For proper recycling, return the battery to your supplier or to a designated collection point.

ENERGY STAR

As an ENERGY STAR Partner, Uniview has followed the EPA's enhanced product qualification and certification process to ensure that the products marked with the ENERGY STAR logo are ENERGY STAR qualified per the applicable ENERGY STAR guidelines for energy efficiency. The logo appears In the event that brightness settings or power mode settings are changed by the user, energy consumption of the panel may increase beyond the limits required for ENERGY STAR certification. Additional information on the ENERGY STAR program and its environment benefits are available on the EPA ENERGY STAR website at <http://www.energystar.gov>
The Manufacturer-reported maximum luminance L_{Max} Reported is 350cd/m².