

P2.5 Indoor Fixed LED Display Unit

MW7825-FI-YC



Features


- High grey level gives detailed and realistic images.
- Seamlessly splice images without black lines on the screen.
- High brightness and contrast provide optimal images.
- Long lifetime.
- Low heating and excellent heat dissipation, no noise.
- Low failure rate and low maintenance cost.
- Ultra-wide viewing angle and satisfactory display effects from different angles.
- High refresh rate and frame frequency provide high image quality.
- Support front maintenance.
- Support wall mount without reserving space for maintenance.
- A quick lock design for the cabinet, easy to install.
- (Optional) Dual power supplies and dual receiving cards for redundancy.

Specifications

Model	MW7825-FI-YC
Module	
Pixel Pitch	P2.5

Module Resolution (W × H)	128 × 64
Module Dimensions (mm)	320 × 160
Cabinet	
Cabinet Dimensions (W × H × D) (mm)	640 × 480 × 67.6
Cabinet Resolution (W × H)	256 × 192
Material	Die-cast aluminum
Processing Image	
Brightness (nits)	600
Color Temperature (K)	2000 to 9500 adjustable
Viewing Angle (H/V)	140°/140°
Contrast Ratio	5000:1
Processing performance	
Pixel Density (pitch/m ²)	160000
Grayscale	12-14 bit
Scanning Mode	32 S
Refresh Rate (Hz)	3840
Electrical	
Power Supply	AC 100 to 240 V
Average Power Consumption (W/m ²)	135
Max. Power Consumption (W/m ²)	450
General	
Maintenance Mode	Front maintenance
Ingress Protection	IP41
Weight (kg/pcs)	9 ± 0.1
Operating Temperature	-10°C to 40°C
Operating Humidity	10% to 80% RH, non-condensing
Storage Temperature	-20°C to 50°C
Storage Humidity	10% to 80% RH, non-condensing
LED Lifetime (h)	100000

Dimensions

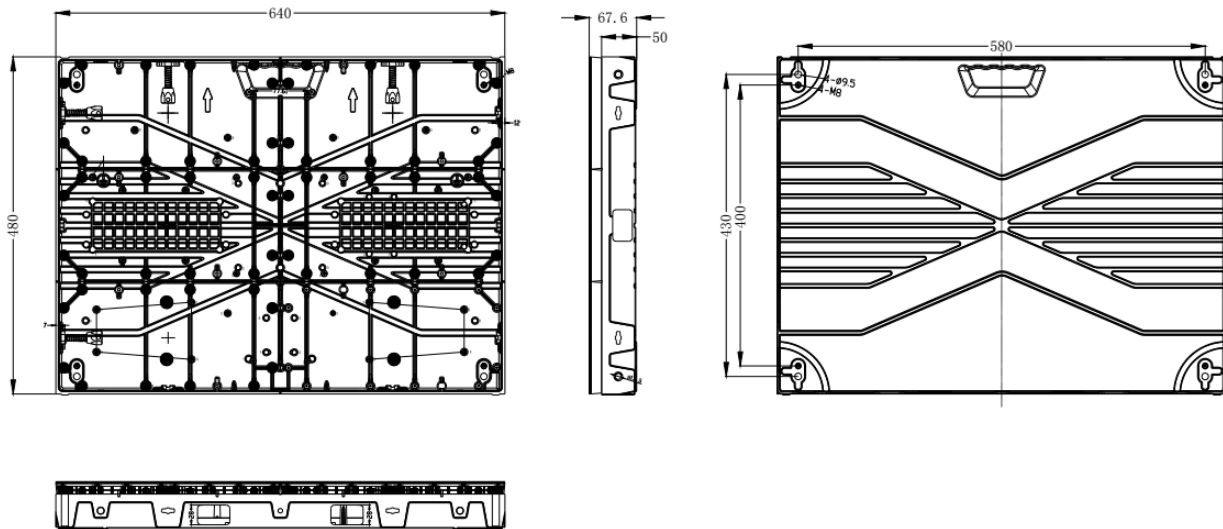

Ordering Info

Product Model	Description
MW7825-FI-YC	P2.5 Indoor Fixed LED Display Unit
MW7825-FI-YC-RM	2.5mm Indoor Fine Pixel Pitch LED Module Accessories

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.