

# 18.5 Inches Monitor

MW3218-L



## Features


- True color display
- Resolution is up to at 1366\*768
- Specific menu design, which is simple to operate
- Support 7\*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

## Specifications


Model	MW3218-L
Panel	
Panel Size	18.5"
LCD Technology/Panel Type	TN
Backlight	ELED
Pixel Pitch (H × V) (mm)	0.3 × 0.3
Resolution	1366 × 768
Color Support	16.7 M
Brightness (cd/m <sup>2</sup> )	250
Contrast Ratio	600:1
Refresh Rate	75 Hz
Response Time (ms)	5
Viewing Angle (H/V)	Horizontal 90°, Vertical 65°

Display Size (mm)	409.80 × 230.40
Operation Hour	24/7
Bezel Width	16mm/ 14.5mm/ 14.5mm (top/ left/ right), 19.5mm (bottom)
Color Gamut	72% NTSC
Surface Treatment	Haze 25%, 3H
<b>Interface</b>	
Video Input	1 × HDMI (MAX 1366 × 768@75Hz) 1 × VGA (MAX 1366 × 768@60Hz)
<b>VESA</b>	
VESA (mm)	75 × 75
Wall-mounted Thread	4-M4 Screw Holes, 8mm Deep
<b>OSD</b>	
Multi-Language	Chinese, English, Korean, Polski, French, Deutsch, Italian, Spanish, Portugues, Japanese, Netherlands
<b>General</b>	
Input Voltage	DC 12V, 2A
Typical Power Consumption (W)	<24
Standby Power Consumption (W)	<0.5
Product Dimensions (W × H × D) (mm)	440.15 × 267.33 × 41 (Without base) 440.15 × 352.61 × 200 (Including base)
Package Dimensions (W × H × D) (mm)	486 × 374 × 93
Weight (kg)	Net Weight: 1.7 Gross Weight: 2.3
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 85% (No Condensation)
Storage Temperature	-20°C ~ 60°C
Storage Humidity	5% ~ 90% (No Condensation)
Standard	1 × HDMI Cable, 1 × Base, 1 × Adapter, 1 × Quick Guide, 1 × Bracket
Material	Plastic
Lifetime (h)	30000
MTBF	50000h

## Dimensions

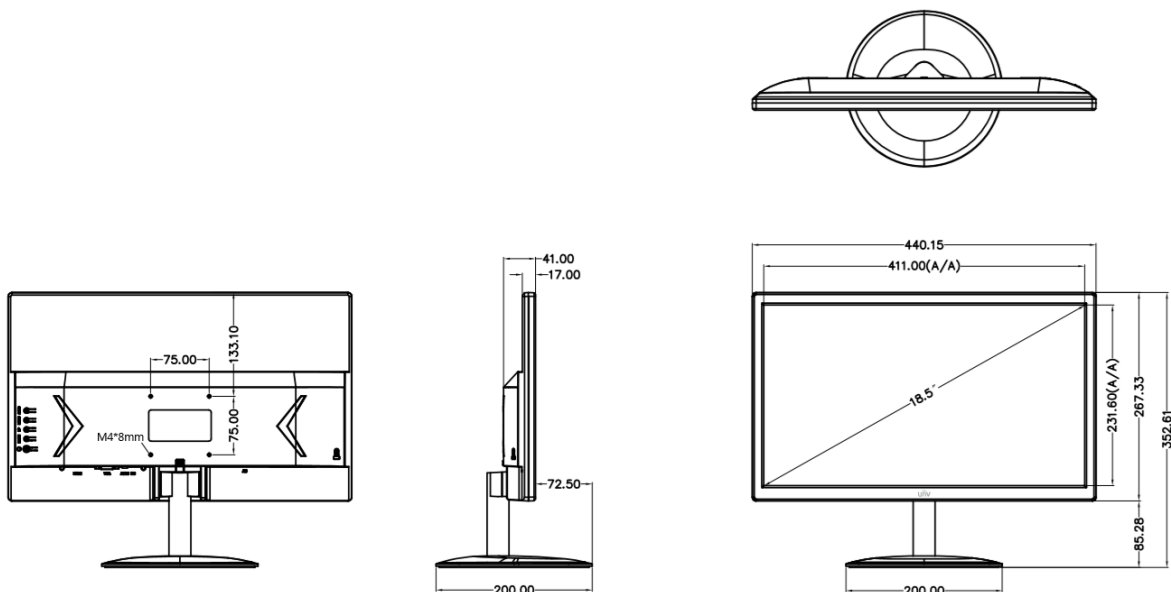

## Interface

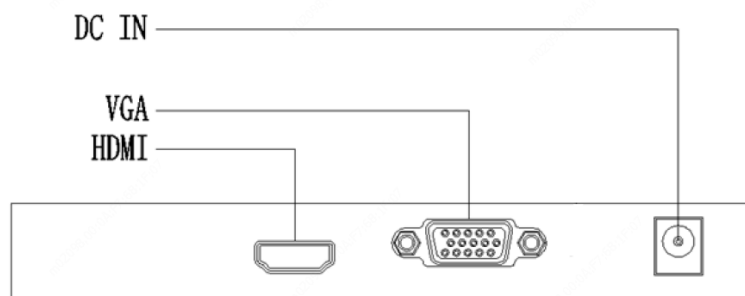

## Ordering Info

Product Model	Description
MW3218-L	18.5 Inches Monitor

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade

Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.