

65 Inches Smart Interactive Display

MW3565-P-C



Features


- 4K ultra-high-definition anti-glare display that clearly presents every screen detail
- Equipped with Android 14.0 smart operating system and unique UI design, allowing free switching between various scene themes
- Front USB and Type-C interfaces that are practical and convenient
- Design featuring minimalist geometric lines, smooth bezel contours, elegant and highly approachable appearance
- Features OPS interface for dual-system expansion; 3 USB interfaces support computer and Android USB sharing functionality
- Front-removable high-precision infrared touch technology supporting up to 40 points for smooth multi-user writing
- Various quick tools such as annotations, screenshots, etc., enhancing usability and interaction efficiency
- Wireless casting function supporting one-click casting from mainstream operating systems including Android, iOS, and Windows
- Smart sleep mode, touch wake-up, and one-key energy saving for environmental protection, power savings, and extended lifespan
- Customizable boot screen, themes, and backgrounds with local media player supporting automatic categorization to meet different scenario requirements

Specifications

Model	MW3565-P-C
Panel	
Backlight	DLED
Panel Size	65"
Resolution	3840 × 2160
Brightness (cd/m ²)	350
Contrast Ratio	1200 : 1
Response Time (ms)	8
Color Support	1.07 B
Viewing Angle (H/V)	178°/178°
Glass	Anti-glare tempered glass
Refresh rate (Hz)	60
Color Gamut	72% NTSC
Lifespan (h)	50000
Haze Value	25%
Pixel Pitch (H × V) (mm)	0.37 × 0.37
Display Size (mm)	1430.5 × 805.5
Camera	
Camera Resolution	8000 × 6000
Touch	
Touch Control	Up to 40-point multi-touch (WIN: 40-point, Android: 32-point)
Touch Precision (mm)	±1
Touch Response Time (ms)	≤10
Touch technology	Infrared touch
System	
CPU	8 × Cortex-A55
RAM	8 GB
ROM	128 GB
CPU Frequency	1.2 GHz
Operation System	Android 14.0
Interface	
Video Input	2 × HDMI, 1 × VGA
Video Output	1 × HDMI
Audio Input	1 × 3.5mm AUDIO IN
Audio Output	1 × 3.5mm AUDIO OUT, 1 × COAX
Other Interfaces	3 × USB2.0 Type-A, 2 × USB2.0 Type-B, 1 × USB2.0 Type-C, 1 × USB3.0 Type-A, 1 × RS232, 1 × OPS, 1 × LAN
Audio	
Speaker	2 × 20 W
Bluetooth	
Bluetooth Version	5.0

Microphone	
Microphone	8-microphone array
Pickup Distance (m)	12
OSD	
Multi-Language	Supports 28 languages: (Simplified Chinese, Traditional Chinese, Japanese, German, English, Spanish, French, Italian, Portuguese, Russian, Korean, Vietnamese, Ukrainian, Hungarian, Polish, Thai, Arabic, Kazakh, Bulgarian, Galician, Catalan, Uzbek, Indonesian, Czech, Croatian, Slovak, Romanian)
VESA	
Wall Mount Hole (mm)	500 x 400
Wall Mount Screw	4-M8
General	
Power Supply	AC 100 to 240 V, 50/60 Hz
Overall Power Consumption (W)	200
Standby Power Consumption (W)	<0.5
Product Dimensions (W × H × D) (mm)	1483.4 × 903.5 × 100.2
Package Dimensions (W × H × D) (mm)	1610 × 1025 × 190
Weight (kg)	Net weight: 31 Gross weight: 41
Operating Temperature	0°C to 40°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Temperature	-20°C to 60°C
Storage Humidity	0% to 90% RH, non-condensing
Accessories Included	1 × Wall mount bracket, 2 × Touch pens, 1 × Screen mirroring device, 1 × 3m power cable, 1 × Quick start guide, 1 × Warranty card, 1 × Certificate of conformity, 1 × Packing list

Dimensions

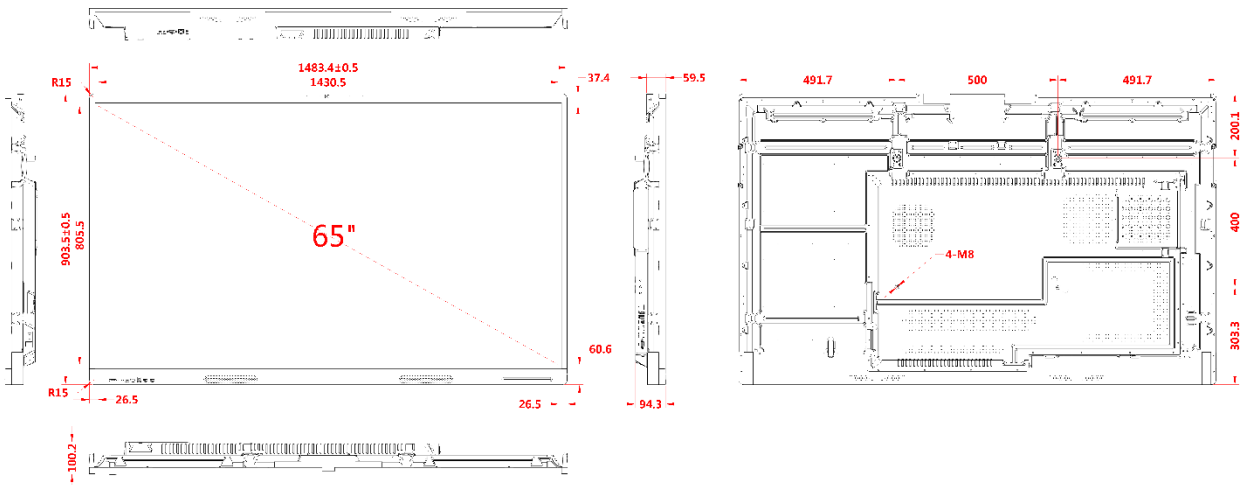

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.