

LCD Splicing Display Unit

MW-A46-B1-C



Key Features

- Industrial-grade panel, highly reliable integrated structure design, continuous stable operation.
- Direct-lit LED backlight provides high brightness uniformity without border shadows.
- Ultra-narrow 3.5 mm seam.
- Supports white balance adjustment, delivering delicate and colorful images.
- Wide 178° viewing angles.
- Built-in image splicing function(work with splitter).
- Support anti-burn technology, landscape and portrait installation.
- Supports delayed boot after power on.
- Advanced direct-lit local dimming technology with low power consumption, saving energy.
- Metal case protects the unit from interference of radiation, magnetic fields, and strong electric fields.
- Support remote control and RS232 hoop control.




Specifications


| | |
|------------|-------------|
| Model | MW-A46-B1-C |
| Panel | |
| Panel size | 46 inches |
| Resolution | 1080P |

| | |
|---------------------------------|--|
| Physical seam (mm) | 3.5 |
| Color support | 16.7M |
| Brightness (cd/m ²) | 500 |
| Contrast ratio | 1200:1 |
| Response time (ms) | 8 |
| Viewing angle | Horizontal 178°, Vertical 178° |
| Interface | |
| Video input | 1*HDMI、1*DVI、1*VGA |
| Other interfaces | 1*USB 2.0、2*RS232、1*IR interface |
| OSD | |
| Multi- Language | English、Simplified Chinese |
| General | |
| Power supply | AC 100 to 240V, 50/60Hz |
| Product dimensions (W*H*D)(mm) | 1022.38*576.97*82.30 |
| Power consumption (W) | 125 |
| Lifetime (h) | 50000 |
| Weight (kg) | Net Weight: 12.65 Gross weight (1 display included): 16.1 Gross weight (2 displays included): 31.3 |
| Operating temperature | 0°C to 40°C |
| Operating humidity | 20% to 90% (non-condensing) |
| Storage temperature | -20°C to 60°C |
| Storage humidity | 10% to 90% (non-condensing) |
| Accessory | |
| Standard | 1*Remote Control、1*Power Cable、1* Ground Wire、1* Infrared Extension Cable、 1*Network Cable |

Appearance


Dimensions

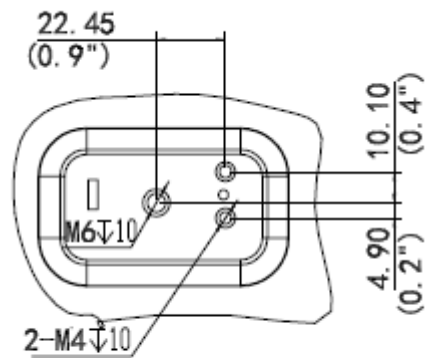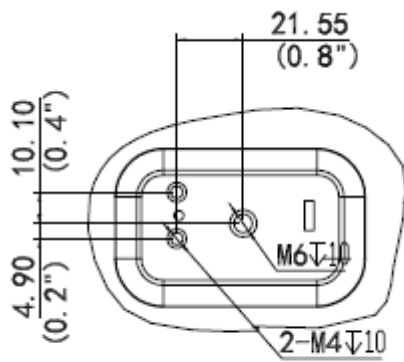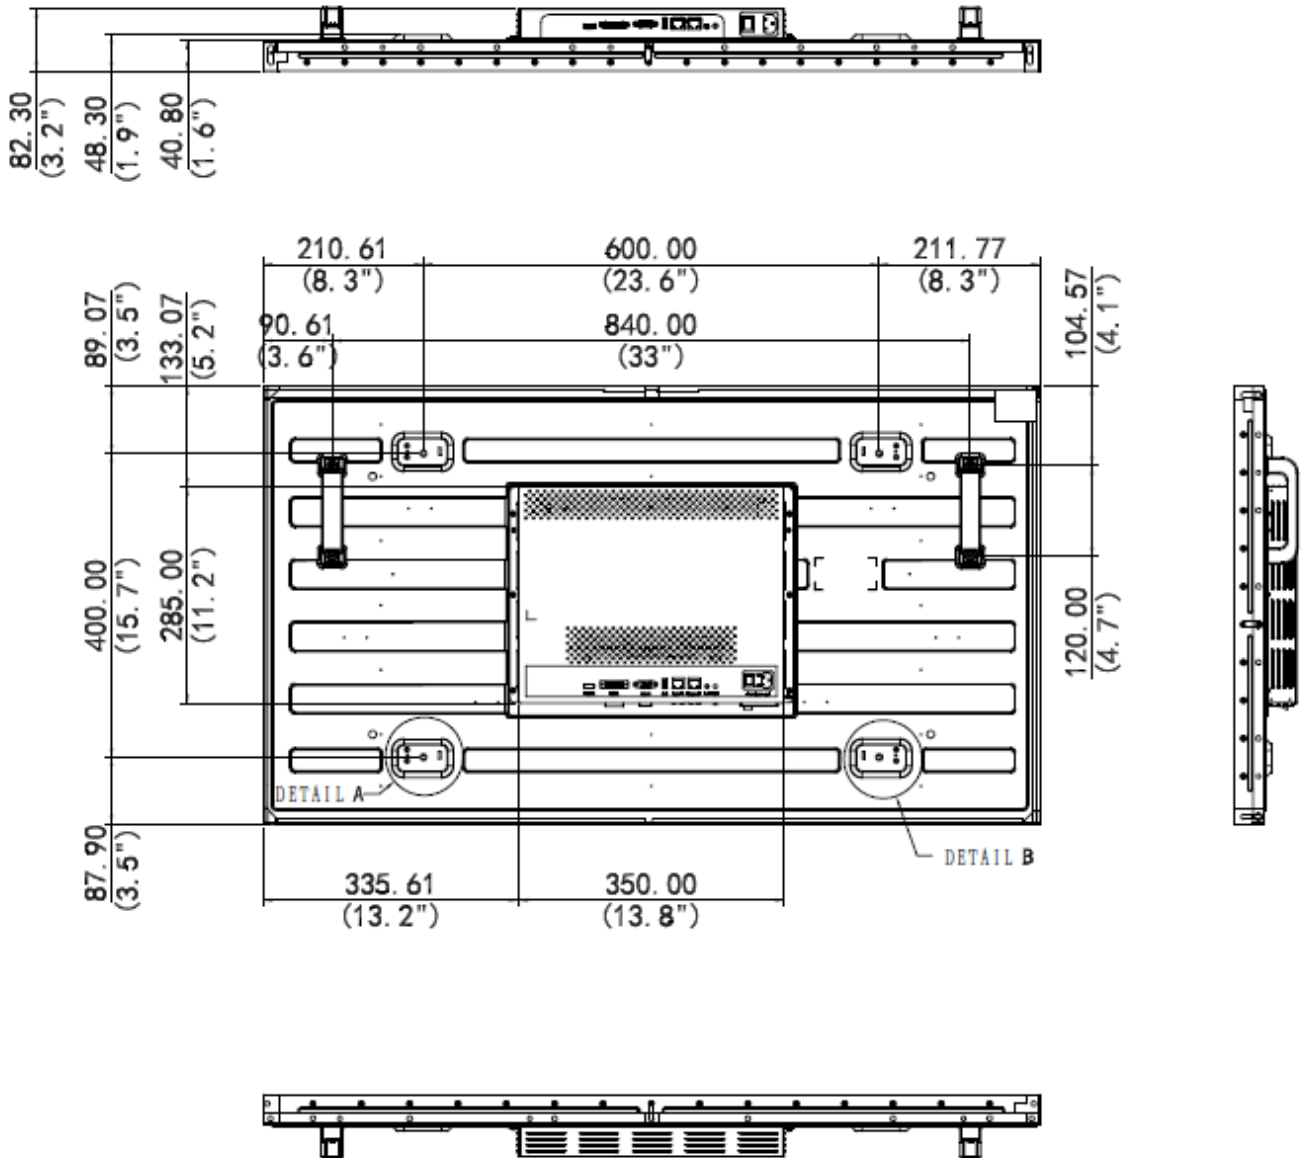

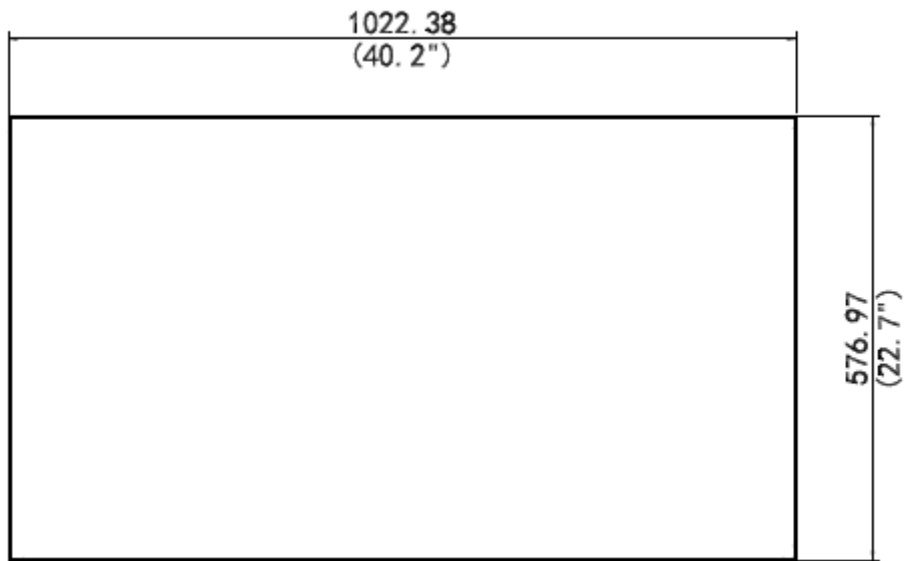

Unit: mm

Interfaces

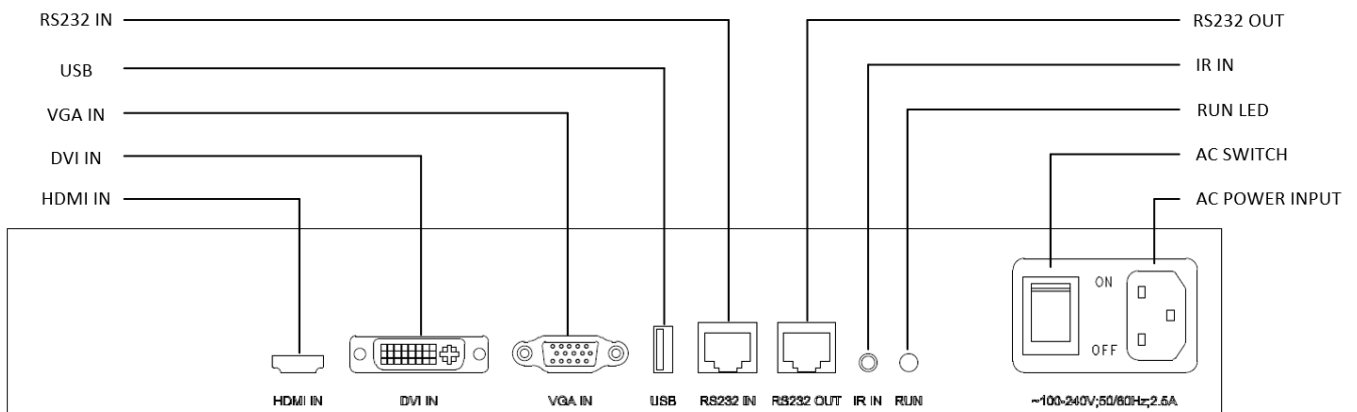

Order Information

| Model | Remarks |
|--|---------------------------|
| MW-A46-B1-C | LCD Splicing Display Unit |
| Splice Screen Hook Assembly (Model: HB-S002-SC1) | Standard |

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.

