

Smart Interactive Display

MW3575-T-S



Key Features

- 4K UHD anti-glare display delivers images with extreme detail.
- Metal casing, ultra-narrow frame, ultra-slim depth.
- The corners and edges are rounded or profiled, safe and reliable.
- Supports wireless screen sharing from computers, tablets, mobile phones to the display through wireless screen sharing dongles or screen sharing software.
- High-precision touch, smoother writing experience.
- Built-in Android system, optional pluggable OPS module, deep integration, richer experience.
- Dual Wi-Fi modules with both Wi-Fi and hotspot support.
- Support Web browser, support application library
- Support: HID Support & Win10/Win8/Win7/Mac OS /Android/Chrome OS/Linux
- Software screen mirroring: Eshare / SCREEN MIRRORING/ ExceedShare. Wireless support from mobile/tablet/laptop.

Specifications


Model	MW3575-T-S
Panel	
Backlight	DLED
Panel size	75 inches
Resolution	3840*2160
Aspect ratio:	16:9
Brightness (cd/m²)	350
Contrast ratio	5000:1
Response time (ms)	8
Color support	1.07B
Viewing angle (H/V)	178°/178°
Android	
CPU	Quad-core Cortex A55, Mali-G52
CPU frequency	2 GHz
RAM/ROM	RAM: 4GB ROM: 32GB
Android version	Android 11.0
Touch	
Touch control	Infrared touch screen, 20-point multi-touch at most
Touch precision (mm)	±2
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare
Response time (ms)	≤6
Touchscreen input	Opaque objects (e.g. finger, pen, etc.)
Interface	
Video input	3*HDMI IN、1*VGA IN、1*DP IN
Video output	1*HDMI OUT
Audio output	1*Line OUT
Control	4* USB 3.0、1* USB 2.0、2* Type C、1*USB2.0_TOUCH OUT 、1* Touch USB、1*RJ 45 IN、1*RJ45 OUT、1* OPTICAL OUT、1*RS232、1*PC AUDIO IN
Audio	
Speaker	2.0 channel 2*15W
Wi-Fi	

Configuration	supports 5G/2.4G
Performance	12m transmission distance in open space
Bluetooth	
Version	5.0
Performance	12m transmission distance in open space
OSD	
Language supported	16 (Czech, Danish, German, English, Spanish, Finnish, French, Italian, Japanese, Dutch, Polish, Portuguese, Russian, Swedish, Simplified Chinese, Albanian)
VESA	
Wall mount hole (mm)	600*400
Wall mount screw	4-M8 screw hole, 20mm depth
Certifications	
Certifications	CE, FCC, RoHS
General	
Power supply	AC 100 to 240V, 50/60Hz
Maximum power consumption (W)	≤ 320
Standby power consumption (W)	< 0.5
Operating temperature	0 to 40°C
Operating humidity	10% to 80% (non-condensing)
Storage temperature	-20 to 60°C
Storage humidity	10% to 90% (non-condensing)
Lifespan	≥ 50,000 hours
Product dimensions (W*H*D)(mm)	1706.00*1015.10*84.10
Package dimensions (W*H*D)(mm)	1836.10*1141.70*230.00
Weight (kg)	Net weight: 58 Gross weight: 68
Accessories included	1*remote control、1*power cord、1*touch pen、1*quick guide、1* wall mount

Appearance

Dimensions

Smart interactive display:

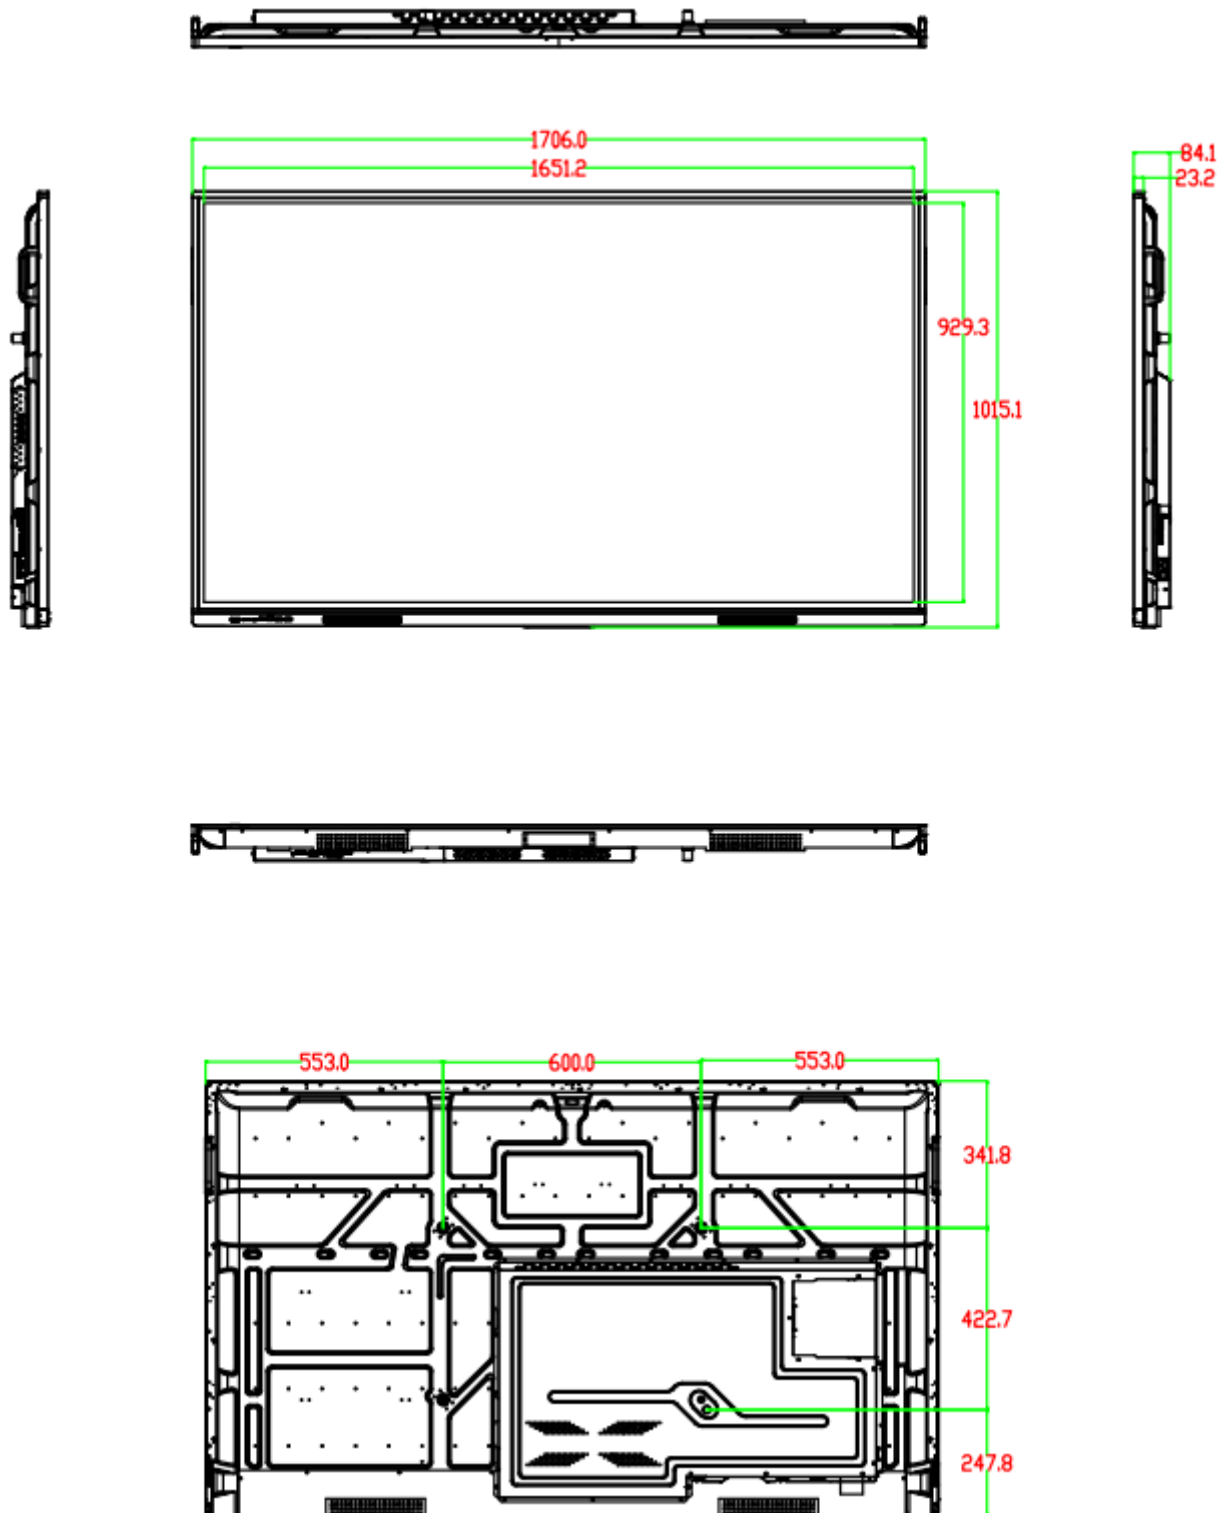

Order Information

Model	Remarks
MW3575-T-S	75" Smart interactive display

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.