

75" Smart Interactive Display

MW3575-U-C



Features

- 4K UHD anti-glare display delivers images with extreme detail.
- Ultra-narrow and equal-width bezel design for perfect aesthetics.
- Dual Wi-Fi modules with both Wi-Fi and hotspot support.
- High-precision infrared touch technology allows up to 20-point touch, realizing smooth co-authoring.
- Multiple utility buttons on the front such as power, volume control, settings, etc.
- A variety of quick tools, such as annotation, screenshot, etc., with a floating ball, improve usability and interaction
 efficiency.
- Wireless screen mirroring from various operating systems such as Android, iOS and Windows to the display with one touch.
- Fast file transfer. Allows users to quickly transfer files to the display via a QR code.
- OTA remote upgrade. The system can be upgraded online without backing up data.
- Split-screen writing. The whiteboard allows independent writing on two split screens at the same time.

1



- The whiteboard supports the insertion of teaching tools such as compass and triangular ruler, making teaching easy and convenient.
- A variety of front interfaces, users can easily and quickly plug/unplug USB drives and other tools.
- OCR recognition. The whiteboard can automatically recognize text and graphics.

Specifications

| Panel | Description |
|--------------------------|---|
| Backlight | DLED backlight |
| Panel size | 75 inches |
| Resolution | 3840*2160 |
| Brightness (cd/m²) | 350 |
| Contrast Ratio | 1200:1 |
| Response Time (ms) | 8 |
| Color Support | 1.07 billion colors |
| Viewing Angle (H/V) | 178° /178° |
| System | Description |
| CPU | Amlogic T982 4*A55 and Mali G52 GPU |
| CPU Frequency | 1.9GHz |
| RAM/ROM | DDR4: 4GB eMMC: 32GB |
| System Compatibility | Android 11.0 |
| Touch | Description |
| Touch Control | Contactless IR sensor, supports 20-point touch |
| Touch Precision (mm) | ±1 |
| Recognizable Object | 5 points, 2mm |
| Glass | 4mm tempered glass, level 7 on Mohs hardness scale, anti-glare |
| Touch Response Time (ms) | ≤10 |
| Touchscreen Input | Opaque objects (e.g. fingers, pens) |
| Interface | Description |
| Video Input | 3*HDMI IN(4K)、1*VGA IN、1*AV IN、1*YPbPr IN、1*DP IN |
| Video Onput | 1*AV OUT、1*HDMI OUT(4K) |
| Audio Input | 1*MIC_IN |
| Audio Onput | 1*EARPHONE、1*coaxial audio output interface(COAX) |
| Other Interfaces | 1*RS232、3*front USB 3.0、1*on-board USB 2.0、1*on-board USB 3.0、 2*TOUCH USB、1*Type-C |
| Network | 1*LAN OUT、1*LAN IN |
| Audio | Description |
| Speaker | Left channel : 1*treble (5W) + 1*bass (15W) Right channel : 1*treble (5W) + 1*bass (15W) |
| Wi-Fi | Description |







| WiFi Configuration | Wi-Fi 5+Wi-Fi 6, supports 5G/2.4G |
|------------------------------------|---|
| WiFi Performance | 30m² coverage, 20m transmission distance in open space |
| Bluetooth | Description |
| Bluetooth Version | 5.0 |
| Bluetooth Performance | 12m transmission distance in open space |
| OSD | Description |
| Multi-Language | 24 (Simplified Chinese, Traditional Chinese, English, Japanese, Arabic, French, Spanish, Portuguese, German, Italian, Dutch, Polish, Korean, Catalan, Galician, Vietnamese, Bulg arian, Kazakh, Russian, Ukrainian, Thai, Uzbek, Hungarian, Croatian) |
| VESA | Description |
| Wall mount hole (mm) | 600*400 |
| Wall mount screw | 4-M8 screw hole |
| General | Description |
| Power Supply | AC 100 to 240V, 50/60Hz |
| Overall Power Consumption (W) | 291.5 (without OPS) |
| Standby Power Consumption (W) | <0.5 |
| Product Dimensions (W*H*D) (mm) | 1720*1035*89 |
| Package Dimensions (W*H*D) (mm) | 2115*1336*222 |
| Weight (Kg) | Net weight: 53.0 Gross weight: 60.5 |
| Operating Temperature | 0° C to 50° C |
| Operating Humidity | 10% to 90% RH, non-condensing |
| Storage temperature | -20° C to 60° C |
| Storage humidity | 0% to 95% RH, non-condensing |
| Accessories Included | 1*power cable、2*touch pen、1*quick guide、1*IR remote controller、 1* wall mounting bracket |




Dimensions

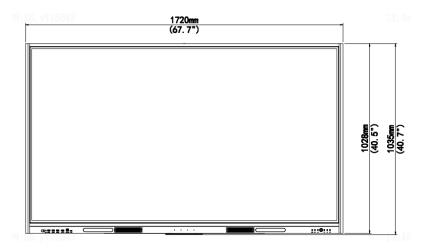

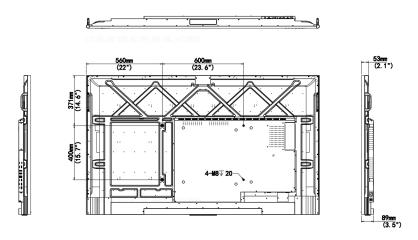



Interface

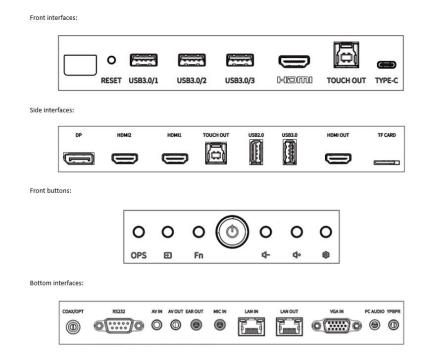

Ordering Information for Optional Accessories

| Model | Remarks |
|--------------|---|
| HB-7199-CA08 | Pluggable 4K Camera Microphone Module |
| HB-7199-MC04 | Pluggable MIC Module |
| HB-7199-TP | Wireless screen sharing dongle |
| HB-8765-S | 65"-86" smart interactive display mobile stand |
| HB-7099-M1 | Pluggable PC module with i5 processor (Windows 10, not activated) |
| HB-7099-S1 | Pluggable PC module with i7 processor (Windows 10, not activated) |
| LIS-WIN10-V | OS-Windows 10-1-to-1 License-IoT Enterprise Value (with i5 processor OPS module) |
| LIS-WIN10-H | OS-Windows 10-1-to-1 License-IoT Enterprise High End (with i7 processor OPS module) |

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

 ${}^{*}\operatorname{Product}$ specifications and availability are subject to change without notice.