

P1.5 Indoor Fine Pixel LED Display

MW7815-FI-FS



Features

- Advanced grayscale gives detailed and realistic images.
- Simple and stylish appearance, easy to install.
- High brightness and contrast provide optimal images.
- Takes up less space with a slim and compact design.
- Long lifetime.
- Low heat, excellent heat dissipation, no noise.
- Low failure rate and maintenance cost.
- Ultra-wide viewing angle ensures satisfactory viewing experience from diversified angles.
- High refresh rate and frame frequency provide high image quality without ghosting or smearing.
- Front maintenance.

Specifications

Model	MW7815-FI-FS	
Module		
Pixel Pitch	P1.538	
Module Resolution (W × H)	208 × 104	
Module Dimensions (mm)	320 ×160	
Cabinet		
Cabinet Resolution (W ×H)	416 ×312	
Cabinet Dimensions (W \times H \times D)	640 ×480 ×64	
(mm)		
Modules Component (W × H)	2 ×3	
Material	Die-cast aluminum	

1




DATASHEE


_

Processing Image		
Single Pixel Brightness Correction	Support	
Single Pixel Color Correction	Support	
Brightness (nits)	450	
Contrast Ratio	4000:1	
Color Temperature (K)	6500 to 9300 adjustable	
Viewing Angle (H/V)	160°/140°	
Center Distance Deviation of LED	<3%	
Brightness Uniformity	≥97%	
Color Uniformity (Cx, Cy)	±0.003	
Processing performance		
Pixel Density (pitch/m 3)	422500	
Surface Evenness (mm)	≤0.2	
Grayscale (bit)	12	
Scanning Mode (S)	52	
Drive Mode	Constant current driving	
Refresh Rate (Hz)	≥3840	
Electrical		
Power Supply	AC 100 to 240 V, 50/60 Hz	
Max. Power Consumption (W/m 3)	358	
Average Power Consumption	119	
(W/m ³)	117	
General		
Maintenance Mode	Front maintenance	
Ingress Protection	IP30	
Weight (kg/pcs)	8.22	
Operating Temperature	-10°C to +40°C	
Operating Humidity	10% to 80% RH, non-condensing	
Storage Temperature	-20°C to +60°C	
Storage Humidity	10% to 85% RH, non-condensing	
LED Lifetime (h)	50000	
Certifications	CE, FCC	



Dimensions

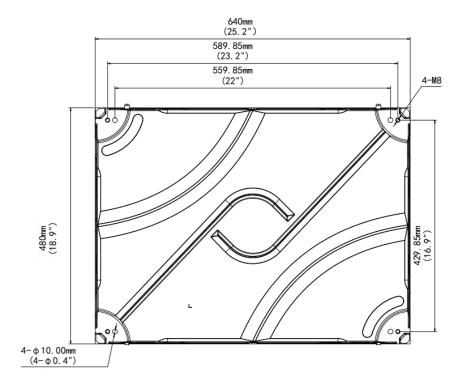

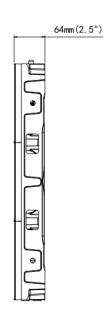

Ordering Info

Product Model	Description
MW7815-FI-FS	P1.5 Indoor Fine Pixel LED Display

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.