## DATASHEE

# 98 Inches Smart Interactive Display

### MW3598-T-E

UNV



#### Features

- 4K display, excellent details, clear, fine, and jagged-free text.
- Zero lamination technology with less than 1mm gap between the cover glass and display panel effectively reduces light refraction and brings better visual effect.
- Supports screen mirroring from computers, tablets, smartphones, etc., through mirroring software or wireless mirroring.
- High-quality touch pen, compatible with multiple systems, seamless switching, delicate writing, and smooth PPT presentations.
- High-definition image processing engine: motion compensation (HDR), pixel-level color enhancement technology.
- Supports one-click screen mirroring for mainstream system devices, with a maximum of four split-screen displays, enabling interaction between large and small screens with synchronized display.
- High-precision touch, supporting up to twenty touch points, single-point writing, two-point zoom, three-point drag, and free switching.
- Drag-and-drop to arrange apps, long press to uninstall, one-click to clear all running tasks from the taskbar, easy and quick management.
- Built-in 2.4G/5G Hz dual-band network card, supporting wireless Internet access and Wi-Fi hotspot.
- Powerful CPU configuration, intelligent signal source recognition, front USB 3.0 interface, full-channel support for Touch USB synchronization.
- Supports full-channel HDMI loop output function, enabling synchronous output via HDMI loop-out interface.

### Specifications

Model	MW3598-T-E	
Panel		
Backlight	DLED	
Panel Size	98"	
Resolution	3840 ×2160	
Brightness (cd/m 3)	350	
Contrast Ratio	1200 : 1	

# UNV

GIIV		
Response Time (ms)	≤8	
Color Support	1.07 B	
Color Gamut	72% NTSC	
Viewing Angle (H/V)	178°/178°	
Display Size (mm)	2158.85 ×1214.35	
Pixel Pitch (H $\times$ V) (mm)	0.56 ×0.56	
Refresh rate (Hz)	60	
Surface Hardness	9H (7 on the Mohs scale)	
Glass Bonding Method	Zero Lamination	
Lifespan (h)	50000	
Haze Value	25%	
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare	
Touch		
Touch technology	Infrared touch	
Touch Control	Up to 40-point multi-touch	
Touch Precision (mm)	±1	
Touch Response Time (ms)	<u>≤8</u>	
Recognizable Object	2 mm	
System	1	
СРИ	4 × A73 (2.2 GHz) and 4 × A53 (2.0 GHz)	
GPU	Mali G52 MC8	
RAM	8 GB	
ROM	128 GB	
Operation System	Android 13.0	
Interface	1	
Video Input	2 × HDMI IN (4K@60)	
Video Output	1 × HDMI OUT (4K@60)	
Audio Input	1 × MIC_IN	
	1 × LINE OUT	
Audio Output	$1 \times \text{SPDIF}(\text{COAX})$	
Network	1 ×LAN	
	3 × USB 3.0	
	1 × Type-C	
	1 ×TOUCH USB 3.0	
Other Interfaces	2 × USB 2.0	
	$1 \times TOUCH USB 2.0$	
	1 ×Micro USB	
	$1 \times \text{TF CARD}$	
Audio		
Speaker	$2 \times 15 \text{ W}$	
Wi-Fi		
Wi-Fi Configuration	Wi-Fi 5, supports 5G/2.4G	
Bluetooth		

# UNV




Bluetooth Version	5.0			
Camera				
Pixel	Win: 48MP for Photos & Video			
	Android: 8MP for Photos & 2MP for Video			
Field Angle (D/H/V)	118.3°/99.2°/69.7°			
Microphone				
Specification	Omni-directional 8-array layout			
Voice Distance (m)	10			
Mic Function	Echo reduction, smart noise-cancellation and Automatic Gain Control			
OSD				
Multi-Language	20 (Simplified Chinese, Traditional Chinese, English, Spanish, Korean, Japanese, Russian, Vietnamese, French, German, Italian, Nederlands, Arabic, Indonesian, Kazakh, Polish, Portuguese, Thai, Ukrainian, Turkish)			
VESA				
Wall Mount Hole (mm)	1000 ×400			
Wall Mount Screw	4-M8 screw hole, 20 mm Deep Thread			
General				
Power Supply	AC 100 to 240 V, 50/60 Hz			
Maximum Power Consumption (W)	610 (without OPS)			
Standby Power Consumption (W)	<0.5			
Product Dimensions (W × H × D) (mm)	2216.1 ×1318.0 ×97.6			
Package Dimensions (W $\times$ H $\times$ D) (mm)	2356 ×1441.5 ×230			
Weight (kg)	Net weight: 92			
weight (kg)	Gross weight: 110			
Operating Temperature	0°C to 40°C			
Operating Humidity	10% to 90% RH, non-condensing			
Storage Temperature	-20°C to 60°C			
Storage Humidity	10% to 90% RH, non-condensing			
Accessories Included	$1 \times$ power cable, $2 \times$ touch pen, $1 \times$ quick guide, $1 \times$ IR remote controller, $1 \times$ wall mounting bracket			
Certification				
Certification	CE, FCC			



### Dimensions

UNV

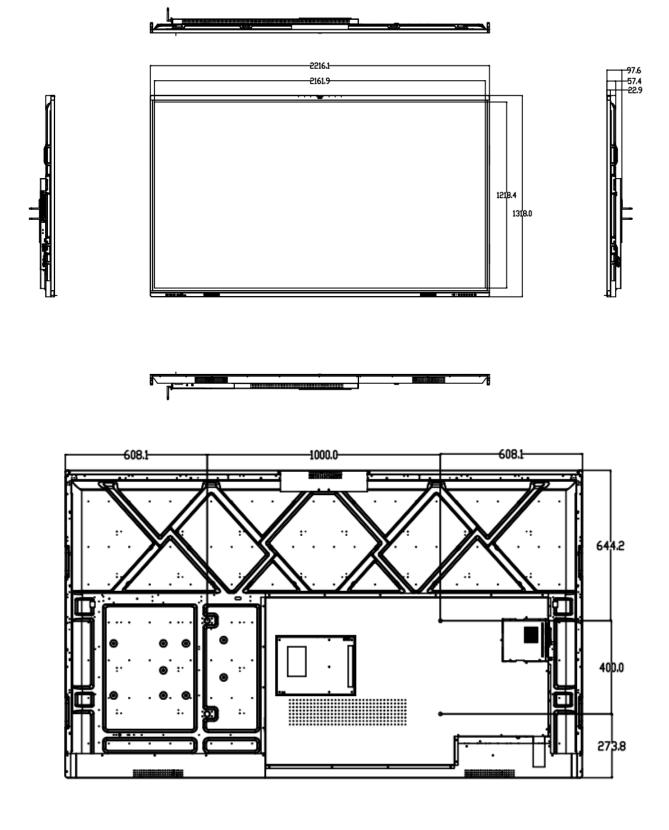


4

# DATASHEE

### Interface

UNV

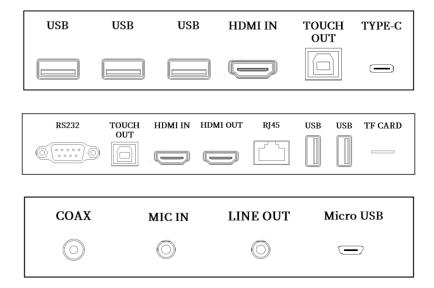

### Ordering Info

Product Model	Description
MW359 8-T-E	98 Inches Smart Interactive Display, 1080P projector, 4K projector, i5 OPS computer, i7 OPS computer, and floor stand requ ire additional configuration

#### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.