

# 162 Inches All-in-one LED Display

MW72T-162H-CW



## Features

- Utilizes flip-chip COB technology, no need for wire bonding, high light efficiency, greener and more energy-efficient.
- High refresh rate, fast frame update speed, no ghosting or motion blur.
- High brightness and contrast, excellent visual experience.
- Plug-&-play Wi-Fi module, easier maintenance.
- Hidden Wi-Fi antenna, more attractive design.
- Compatible with both long and short OPS computers.
- Supports screen mirroring via NFC on Android phones; simply tap the mobile phone to mirror the screen.
- Enables remote control for power on/off, screen switching, and menu settings.
- Uses front lock connection plates for leveling, easier installation.
- Both module boards and the OPS computer support front maintenance, no maintenance channel required.


## Specifications

Model	MW72T-162H-CW
Module	
Pixel Pitch	1.875
Cabinet	
Display Resolution (W × H)(mm)	1920 × 1080
Display Size (W × H)(mm)	3600 × 2025
Processing Image	
Brightness (nits)	600
Viewing Angle (H/V)	160°/160°
Contrast Ratio	20000:1

Color Temperature (K)	6500
Processing performance	
Grayscale (bit)	14
Refresh Rate (Hz)	3840
System	
CPU	Cortex-A55
GPU	Mali-G52
RAM	4 GB
ROM	32 GB
Operation System	Android 11.0
Interface	
Input Interface	1 × HDMI (max. 2048 × 1152 @60 Hz)
Output Interface	1 × HDMI 1 × Line out 1 × SPDIF
Other Interfaces	4 × USB 2.0 1 × RS 232
Network	1 Gigabit network interface, RJ45, device management interface 10M/100M/1000M Base-T adaptive.
OPS	1, 90 W
Speaker	15 W × 2
Bluetooth	5.2
Wi-Fi	Dual Wi-Fi module AP: 1 × Wi-Fi 5, supports 2.4GHz/5GHz Station: 1 × Wi-Fi 6, supports 2.4GHz/5GHz
Electrical	
Power Supply	AC 100-240 V; 50 Hz/60 Hz
Maximum Power Consumption (W)	2360
Average Power Consumption (W)	800
Standby Power Consumption (W)	0.6
General	
Product Dimensions (W × H × D) (mm)	3614.0 × 2148.6 × 63.9 (excluding square steel) 3614.0 × 2148.6 × 103.9 (including square steel)
Weight (kg)	Net weight: 210 (To Be Determined) Gross weight: 240 (To Be Determined)
Operating Temperature	-10°C to 40°C
Operating Humidity	10% to 80% RH (non-condensing)
Storage Temperature	-20°C to 60°C
Storage Humidity	10% to 85% RH (non-condensing)
Certifications	CE/FCC/CB

Standard	2 × power cable (10 m), 1 × remote control, 1 × quick guide, 1 × wireless screen sharing dongle, 1 × vacuum sucker, 1 × level instrument, 1 × OPS installation accessories, 1 × wall mount square steel
----------	---

## Dimensions

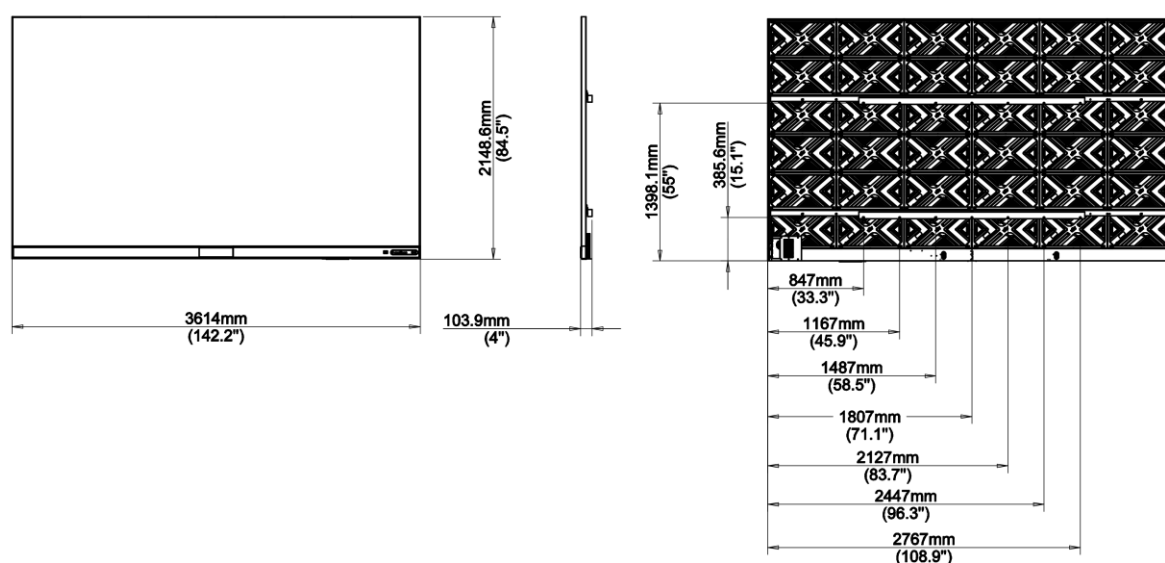

## Ordering Info

Product Model	Description
MW72T-162H-CW	162 Inches All-in-one LED Display

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.