

75 Inches LED Monitor

MW3275-F



Features

- $lue{}$ LED backlight technology with ultra HD 3840 imes 2160
- High fidelity digital processing, brilliant and vivid video
- Wide view of field: $178 \,^{\circ}(H) / 178 \,^{\circ}(V)$
- User-friendly operation menu, which is simple to operate
- Lower power consumption and long life cycle
- VESA stand bracket
- Support abundant interfaces
- The screen features a symmetrical four-edge bezel design, combining sleek aesthetics with practical functionality.

Specifications

Model	MW3275-F	
Panel		
Backlight	DLED	
Panel Size	75"	
Resolution	3840 ×2160	
Color Support	1.07 B	
Brightness (cd/m 3)	350	
Contrast Ratio	1200:1	
Response Time (ms)	≤8	
Viewing Angle (H/V)	178° /178°	
Pixel Pitch (H × V) (mm)	0.43×0.43	
Display Size (mm)	1650.24 ×928.26	

1




DATASHEE


UIIV	DAIASHEL
Refresh Rate	60Hz
Operation Hour	24/7
Bezel Width	27.2mm (top/left/right/bottom)
LCD Technology/Panel Type	IPS
Interface	
Video Input	1 × VGA, 2 × HDMI, 1 ×DVI, 1 ×DP (VGA\DVI support a maximum input resolution of 1920 × 1080@60 Hz, HDMI\DP support a maximum input resolution of 3840 × 2160@60 Hz)
Audio Input	1 ×AUDIO IN
Audio Output	1 ×AUDIO OUT
Other Interfaces	$1 \times \text{USB}, 1 \times \text{RS}232 \text{ IN}, 1 \times \text{RS}232 \text{ OUT}$
Speaker	
Speaker	$2 \times 10 \text{ W}$
VESA	
VESA (mm)	600 ×400
Wall-mounted Thread	4-M8 screw hole, 25 mm Deep Thread
OSD	
Multi-Language	English, Simplified Chinese
General	
Input Voltage	AC 100 ~ 240 V, 50/60 Hz
Typical Power Consumption (W)	<200
Standby Power Consumption (W)	< 0.5 (Standby)
Product Dimensions (W \times H \times D) (mm)	1706.5 ×984.67 ×75.4
Package Dimensions (W \times H \times D) (mm)	1835 ×1140 ×200
Weight (kg)	Net Weight: 47.8
	Gross Weight: 54
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 90% (No Condensation)
Storage Temperature	-10°C ~ 60°C
Storage Humidity	10% ~ 90% (No Condensation)
Material	Metal housing
Lifetime (h)	30000
Standard	$1 \times \text{HDMI Cable}, 1 \times \text{Power Cable}, 1 \times \text{Remote Control}, 1 \times \text{Quick Guide}, 1 \times \text{Wall mount}$
MTBF (h)	50000



Dimensions

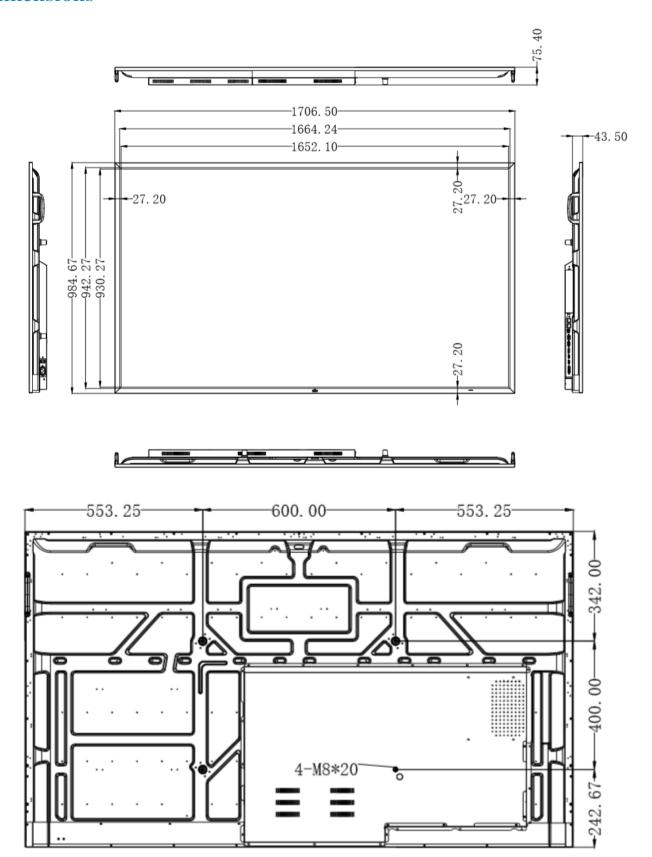



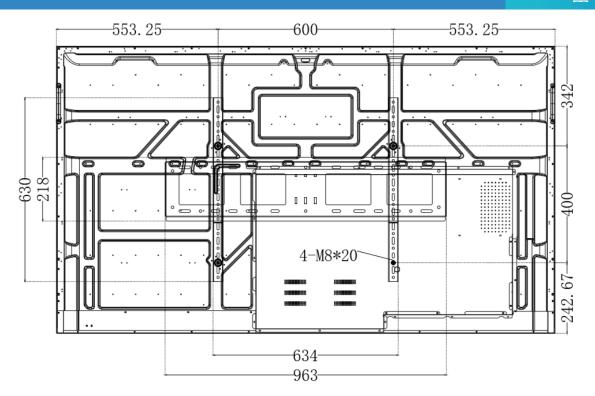

Interface





Ordering Info

Product Model	Description
MW3275-F	75 Inches LED Monitor

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.