

# Conference Speakerphone

## Unear M31E



## Features


- 8-MEMS mic omnidirectional array.
- 6m audio collection range.
- Professional cavity structure, high-power speaker.
- 5-device in daisy chain, seamless expansion with self-developed algorithms.

## Specifications


Model	Unear M31E
Speaker	
Rated Output Power	4Ω/5 W
Total Harmonic Distortion	≤ 5%
Speaker	Single speaker
Microphone	
Microphone Type	8 MEMS
Sensitivity	-26Dbfs 94 dB SPL @ 1 kHz
SNR	64dB(A)@20 kHz bandwidth, A-weighted
Pickup Range	6 meters
Audio Performance	
Full-duplex Transmission	Support
Echo Cancellation	Support
Auto Gain Control	Support
Reverberation Suppression	Support

Max. Background Noise Suppression	Support
Cascade	
Cascade Mode	POE network cable
Cascaded Devices	≤ 5 units
General	
Accessories Included	1 × Quick Guide, 1 × POE Network Cable, 1 × Data Cable
Operating System Support	Windows/Linux/Mac
Power Supply	Type C, PoE, DC
Product Dimensions (W × H × D) (mm)	156 × 55 × 147
Packaging Dimensions (W × H × D) (mm)	200 × 300 × 90
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Operating Humidity	10% to 90% RH (non-condensing)
Weight (kg)	Net weight: 1.06 Gross weight: 1.25
Interface	
USB	USB Type-C
Power	DC
Network Port	1 x PoE IN, 1 x PoE OUT
Power Button	Support
Audio	Audio output
Indicator	Power indicator

## Dimensions

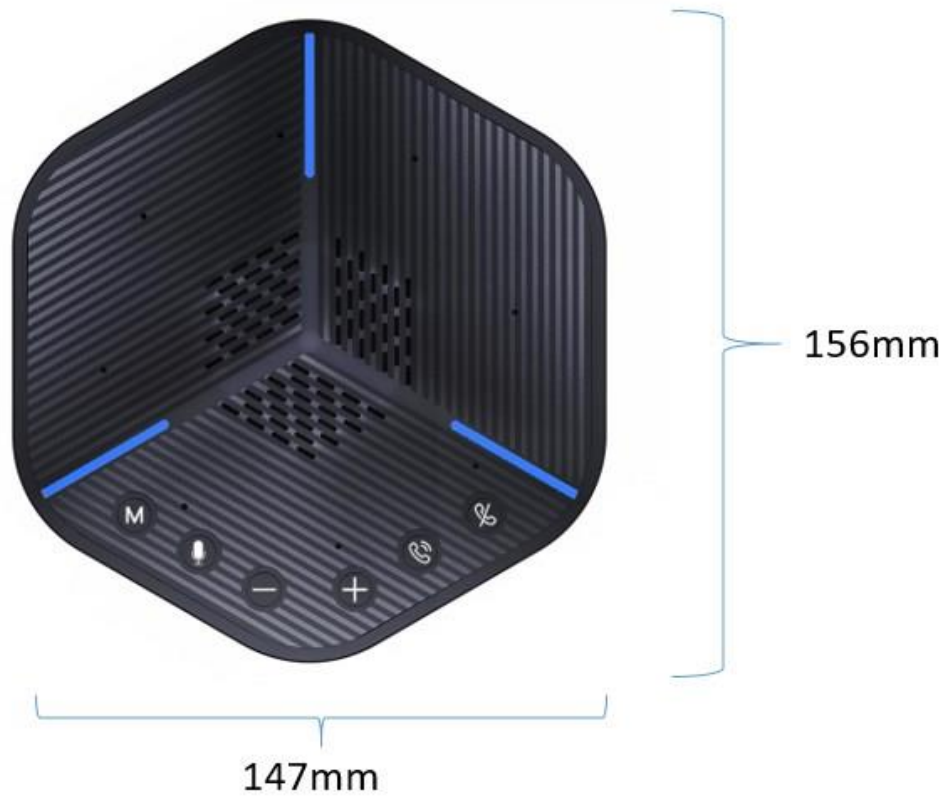

## Interface

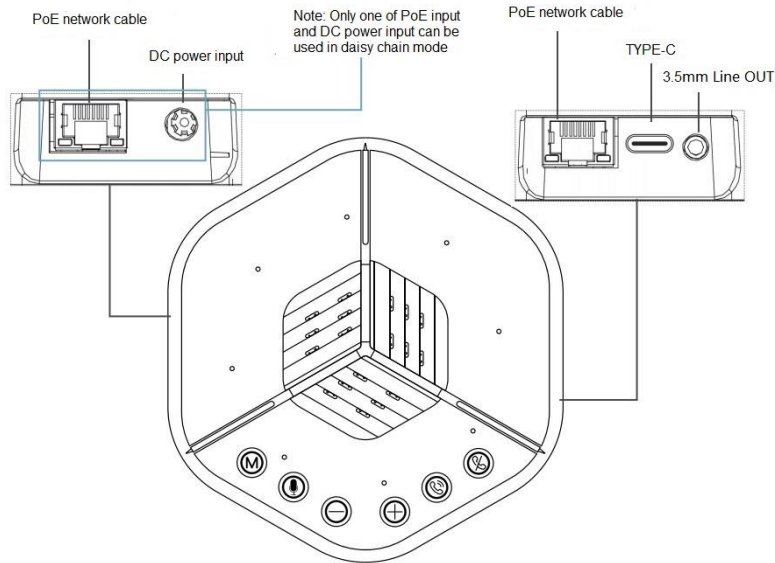

## Ordering Info

Product Model	Description
Unear M31E	Conference Speakerphone

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.