

P1.25 Indoor Fine Pixel LED Display

MW7812-FI-FS



Features

- Advanced grayscale gives detailed and realistic images.
- Simple and stylish appearance, easy to install.
- High brightness and contrast provide optimal images.
- Takes up less space with a slim and compact design.
- Long lifetime.
- Low heat, excellent heat dissipation, no noise.
- Low failure rate and maintenance cost.
- Ultra-wide viewing angle ensures satisfactory viewing experience from diversified angles.
- High refresh rate and frame frequency provide high image quality without ghosting or smearing.
- Front maintenance.

Specifications

Model	MW7812-FI-FS
Module	
Pixel Pitch	P1.25
Module Resolution (W × H)	256 × 128
Module Dimensions (mm)	320 × 160
Cabinet	
Cabinet Resolution (W × H)	512 × 384
Cabinet Dimensions (W × H × D) (mm)	640 × 480 × 64.6
Modules Component (W × H)	2 × 3
Material	Die-cast aluminum

Processing Image

Single Pixel Brightness Correction	Support
Single Pixel Color Correction	Support
Brightness (nits)	450
Contrast Ratio	4000:1
Color Temperature (K)	6500 to 9300 adjustable
Viewing Angle (H/V)	160°/140°
Center Distance Deviation of LED	<3%
Brightness Uniformity	≥97%
Color Uniformity (Cx, Cy)	±0.003

Processing performance

Pixel Density (pitch/mm)	640000
Surface Evenness (mm)	≤0.2
Grayscale (bit)	12
Scanning Mode (S)	64
Drive Mode	Constant current driving
Refresh Rate (Hz)	≥3840


Electrical

Power Supply	AC 100 to 240 V, 50/60 Hz
Max. Power Consumption (W/m ²)	471
Average Power Consumption (W/m ²)	157

General

Maintenance Mode	Front maintenance
Ingress Protection	IP30
Weight (kg/pcs)	8.32
Operating Temperature	-10°C to +40°C
Operating Humidity	10% to 80% RH, non-condensing
Storage Temperature	-20°C to +60°C
Storage Humidity	10% to 85% RH, non-condensing
LED Lifetime (h)	50000
Certifications	CE, FCC

Dimensions

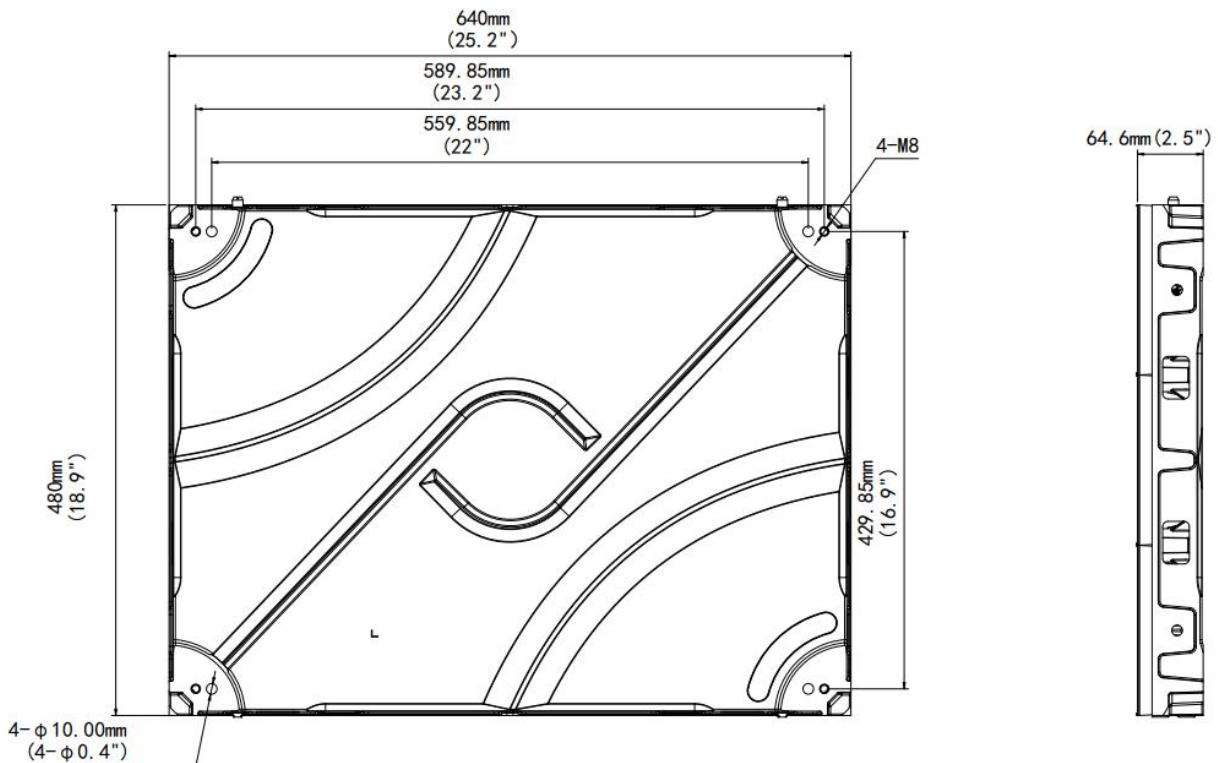

Ordering Info

Product Model	Description
MW7812-FI-FS	P1.25 Indoor Fine Pixel LED Display

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.